




FOAM PROPORTIONING EQUIPMENT

FOAM CONCENTRATE FILL PUMP

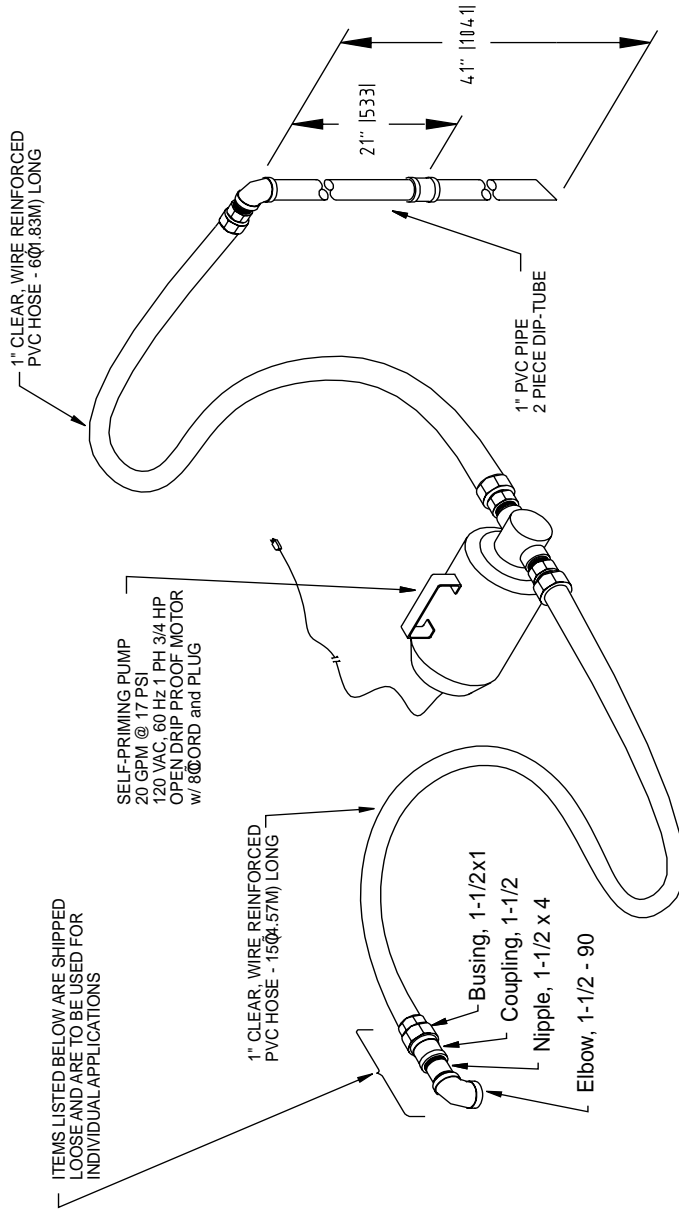

ITEMS LISTED BELOW ARE SHIPPED LOOSE AND ARE TO BE USED FOR INDIVIDUAL APPLICATIONS

SELF-PRIMING PUMP
20 GPM @ 17 PSI
120 VAC, 60 Hz, 1 PH, 3/4 HP
OPEN DRIP PROOF MOTOR
w/ 8-WIRE and PLUG

1" CLEAR, WIRE REINFORCED
PVC HOSE - 15(4.57M) LONG

Busing, 1-1/2x1
Coupling, 1-1/2
Nipple, 1-1/2 x 4
Elbow, 1-1/2 - 90

1" CLEAR, WIRE REINFORCED
PVC HOSE - 6(1.83M) LONG

1" PVC PIPE
2 PIECE DIP-TUBE

MATERIAL DESCRIPTION

PUMP:

BODY: COMPOSITE
IMPELLER: NITRILE
SHAFT: STEEL w/ SPECIAL 316 STAINLESS STEEL SLEEVE
SHAFT SEAL: MECHANICAL LIP TYPE
PORTS: 1ØNPT

FITTINGS:

CAD PLATED STEEL, BRASS and MALLEABLE IRON
DIP TUBE:
PVC PIPE and FITTINGS

NOTES:

1. DIP TUBE IS OF TWO PIECE CONSTRUCTION FOR USE WITH 5 GAL PAILS/55 GAL DRUMS
2. APPROXIMATE WEIGHT - 49 lbs (22 Kg)

